



ZEC S.p.A.

Via Lungolorno 11 - 42052 Colorno (PR) - Italia

Tel. 0521 816631 - Fax 0521 816772

info@zecspa.com - www.zecspa.com


Capitale sociale: Euro 1.000.000

C.F., P.IVA e n. Iscr. Reg. Imprese Parma: IT01720400348

Numero REA: PR - 173914

## JC7 Series Thermoplastic hose - Water-proof Cover\*

- WORKING PRESSURE FROM 200 BAR/3.000 PSI TO 275 BAR/4.000 PSI
- SUPER SLIDING AND ABRASION RESISTANT
- LOW VOLUMETRIC EXPANSION AND PRESSURE LOSSES
- HIGH OPERATING SPEED AND FLOATATION
- AVAILABLE ALSO IN SIZE 1 1/4" -24

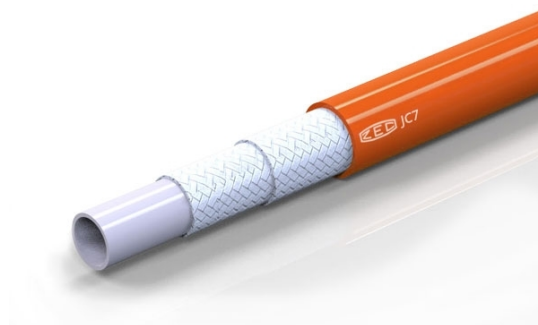







HIGH PRESSURE



WATER

## TECHNICAL FEATURES

Metric

	 ID			 OD	 1:2.5 WP	 R MIN	 g	
Code	inch	mm	DN	mm	bar	mm	g/m	Ferrule Code
JC767101	1/2"	13.0	12	22.4	275	75	277	BP12JC7
JC777101	5/8"	16.0	16	26.5	220	100	372	BP34JC7
JC787101	3/4"	19.2	19	29.8	207	120	431	BP34JC7
JC797101	1"	25.6	25	37.7	207	150	580	BP1JC7S
JC7107101	1 1/4"	32.0	32	46.0	207	235	926	BP114JC7
JC7127101	1 1/2"	38.2	38	54.0	207	375	1186	BP112JC7

## TECHNICAL FEATURES

### Reels length:

80-100-120-150-180-200-250 m

### Technical-constructive features:

Inner core in thermoplastic compound, reinforcement in double polyester fiber braid and outside covering in antiabrasion polyurethane, pin-pricked, stabilized to UV rays and resistant to hydrolysis for outdoor applications, in environments having high humidity and saline levels.

### Applications:

The JC7 Series hoses have been created for water applications in the high pressure cleaning field.

### Working temperature:

from -40°C to +55°C from -40°F to +131°F

### Working pressure:

Safety ratio 1:2,5

\*The water-proof feature of the cover means that the hose is especially suitable for wet and saline environments where there are extreme temperature changes.

OPTIONAL

-  Pin-pricking
-  Color
-  Cover
-  Multi-tube
-  Packing
-  Long Length

For any further information about the optional items, please contact the sales office ()